


jrtechlabs
pvt. ltd

Innovations
Customized

OUTDOOR RACK SERIES
WALL/ POLE/ FLOOR
MOUNT RACKS

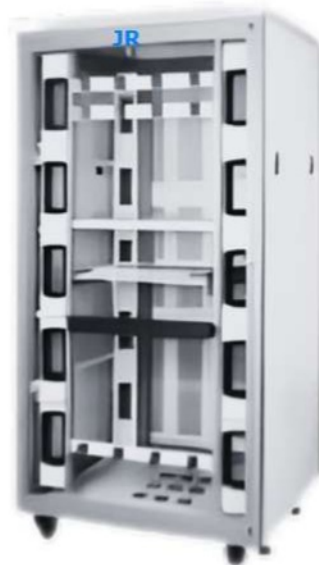

www.jrtechlabs.com

PRODUCT SUMMARY




JR wall/pole/floor mount racks are designed for outdoor applications to meet IP55 applications. Racks are manufactured of pre-galvanized iron (GI) steel sheets. Pre-galvanized iron (GI) sheets are steel sheets that are coated with zinc and include a range of hot-dip galvanized and electro-galvanized steel sheets to protect the steel from the corrosive attack in most atmospheres, acting as a continuous and lasting shield between steel and the atmosphere. Due to this application, the lifetime of the product will be longer. GI sheets punched, formed welded with a tight mechanical design, a clear line, and a vent system, outdoor satisfies the requirements of customers in both high-temperature locations and regions with extremely low temperatures. The rack frame perforation along with internal accessories creates a highly flexible cabinet. Using exhaust fans, cooling units, heat exchangers and heating will allow for a favorable climate and stable temperatures inside the cabinet.

- ◆ Designed directly for outdoor applications
- ◆ The highest protection against corrosion
- ◆ Perfect protection against weather
- ◆ Color RAL7035
- ◆ PU non-porous gasket – suitable for extreme temperature ranges
- ◆ IP55 dust and water protection
- ◆ Vandalism-proof – the side panels, rear panel, and roof are welded from inside, and they are equipped with closed hinges and compact metal handles
- ◆ Compact design - no point of access for lever-type tools
- ◆ Front Door with Lock Option
- ◆ Welded pre galvanized sheet steel.
- ◆ Powder coat with UV protection

Available from 4U~15U, variants with 500mm depth.



PRODUCT DETAILS

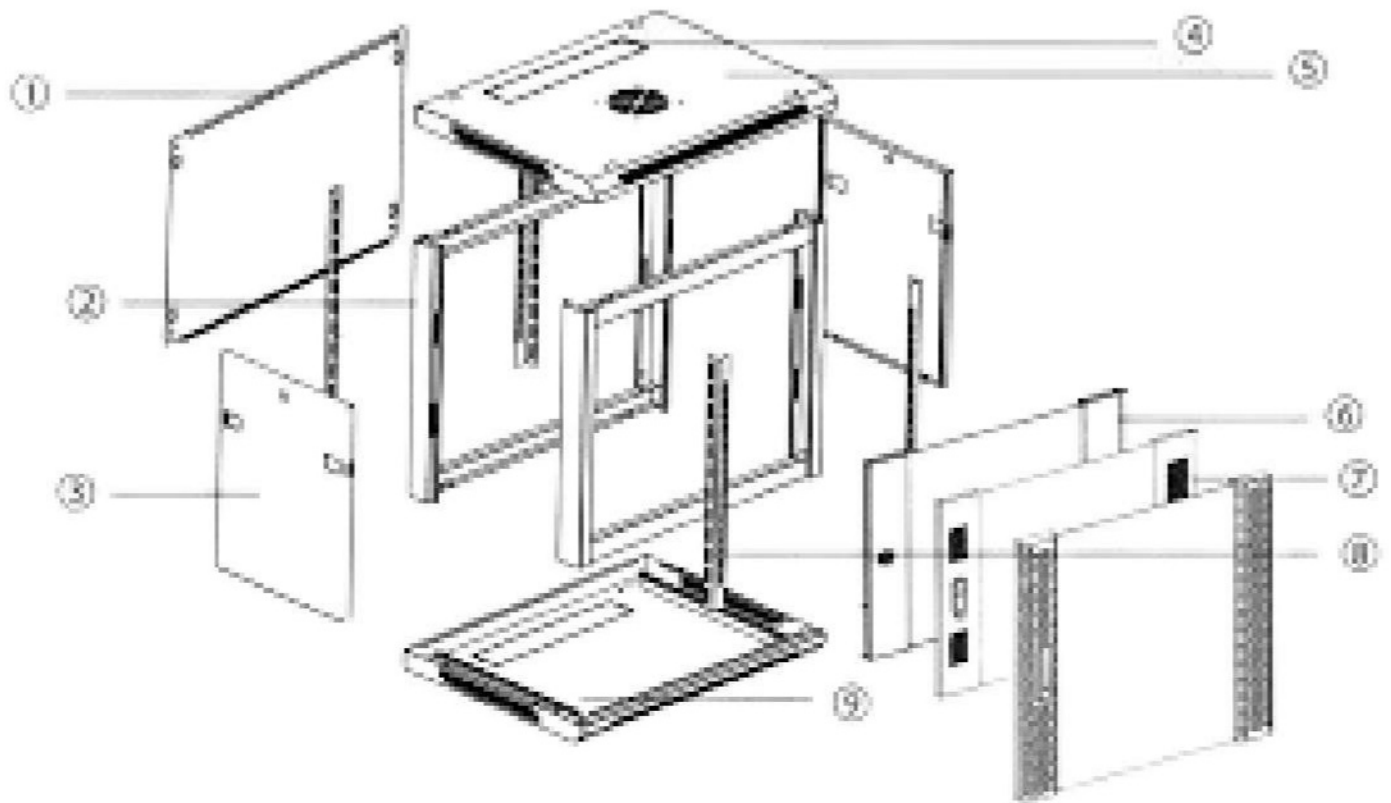

- 500D Box
- Bottom Panel
- Top Strip
- Canopy
- Depth Members

- Hinges
- Front Door
- CAM Lock
- 19 LAngle
- Hood For Louvers

- Filter Tray
- Wall Mounting Brackets
- Pole Mounting Brackets
- Floor Mounting Brackets
- Cable Glands



PRODUCT DETAILS

- ◆ Conforms to DIN 41494 OR equivalent ISO Standards.
- ◆ Adjustable 19" equipment mounting angles with a U marking provide better mounting flexibility and maximize the usable mounting space.
- ◆ Depth adjustable mounting slots.
- ◆ Precision engineering capabilities and the best efficient software configuration product technology provide the best product quality and fastest delivery in the industry.
- ◆ Top and bottom Panel with ventilation and cable entry facility.
- ◆ Screw Package
- ◆ Rubber closure for cable entry holes (top & bottom), 19" adjustable front & rear rails
- ◆ Provision to mount the cooling fans on the top/ Side panels or Front doors.
- ◆ Powder coated finish with Seven Tank pre-treatment process meeting all industrial standards
- ◆ Grounding and Bonding Options.
- ◆ 100% assured compatibility with all equipment conforming to DIN 41494. (General industrial standard for equipment)
- ◆ Accessories : Canopy Inclusive



TECHNICAL DATA

RACK STANDARD	Conforms to 41494 or equivalent standard
CONSTRUCTION	Welded (1.2mm Thickness)
BASIC FRAME	C.R.C.A or SS Steel
FRONT DOOR	Lockable toughened Glass (4mm) / Metal (Grill Provision-Optional)
EQUIPMENT MOUNTING	DIN Standard 10mm. Square slots
19 MOUNTING ANGLE	Formed Steel Zinc
STANDARD FINISH	Powder Coating
STANDARD COLOR	Textured Grey/Black (Others on request)
TOP AND BOTTOM	Welded, with necessary ventilation and Cable entry cutouts on the bottom panel
STANDARD MOUNTING OPTION	Wall or Pole or Floor mounting brackets
STATIC LOAD	40 to 50 Kgs



PRODUCT CODES AND DIMENSIONS

PART CODE	Total Height	Usable Height	Total Width	Usable Width	Total Depth	Usable Depth
	in MM (H)	in MM (H)	in MM (W)	in Inches (W)	in MM (D)	in MM (D)
JR-ODWM-6050-04U	258	4U	600	19	500	450
JR-ODWM-6050-06U	347	6U	600	19	500	450
JR-ODWM-6050-09U	480	9U	600	19	600	550
JR-ODWM-6050-12U	613	12U	600	19	500	450
JR-ODWM-6050-15U	747	15U	009	19	500	450

1U=4445 mm/1.75 inch

Note:

1. Other models can be manufactured on request.
2. It is recommended to distribute the load along with “U” space in the rack.
3. All dimensions are in mm.

JR Techlabs Pvt Ltd

**G-4 Royal Tower, A20 1st Cross West,
Thillai Nagar, Trichy - 620 018,**

 jrtechlabs.com

 **+ 91 8903560009**

 sales@jrtechlabs.com

 **+ 91 9443750002**

www.jrtechlabs.com

